
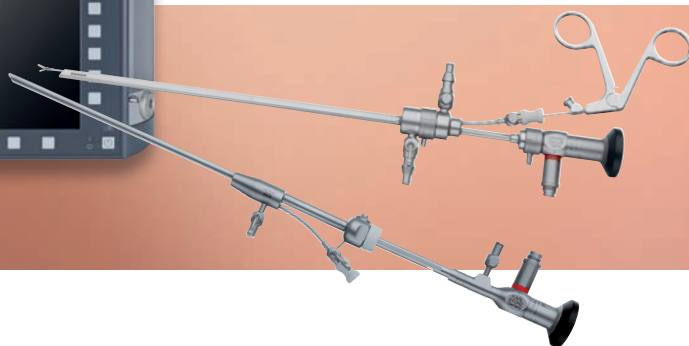


## Hysteroscopes from KARL STORZ

Diagnostic and Operative Solutions  
for “Office Hysteroscopy”



# CAMPO TROPHYSCOPE®

based on integrated 2 mm rod lens telescope

## Special Features:

- Unique possibility of atraumatic insertion in the cervical canal without dilation and anesthesia due to very small outer diameter
- Innovative feature: Sheath with gliding mechanism
  - Primary approach to uterine cavity only with 2.9 mm outer diameter
  - Intraoperative changeover from single-flow to continuous-flow and/or operating sheath
- TROPHYSCOPE® features greater stability thanks to integrated irrigation channel
- Working channel allows the use of semirigid 5 Fr. operating instruments and bipolar electrodes
- Brilliant image quality thanks to HOPKINS® rod lens system

## Without working channel



26008 BAC CAMPO **TROPHYSCOPE®**, HOPKINS® telescope 30°, size 2.9 mm, length 24 cm, with irrigation connector, for use with Continuous-Flow Operating Sheaths 26152 DA and 26152 DB

26152 DA **Continuous-Flow Examination Sheath**, size 3.7 mm, length 18 cm, with suction adaptor, for use with CAMPO TROPHYSCOPE® 26008 BAC

### With working channel




26008 BAC CAMPO **TROPHYSCOPE**<sup>®</sup>, HOPKINS<sup>®</sup> telescope 30°, size 2.9 mm, length 24 cm, with irrigation connector, for use with Continuous-Flow Operating Sheaths 26152 DA and 26152 DB

26152 DB **Continuous-Flow Operating Sheath**, size 4.4 mm, length 16 cm, with channel for semirigid instruments 5 Fr., with 1 stopcock and 1 LUER-Lock adaptor, for use with CAMPO TROPHYSCOPE<sup>®</sup> 26008 BAC

### Recommended Accessories:



 26152 DS **TROPHY Curette**, for use with Continuous-Flow Sheaths 26152 DA and 26152 DB

## BETTOCCHI® Hysteroscope (5 mm)

based on 2.9 mm rod lens telescope


### Special Features:

- Atraumatic insertion in the cervical canal due to oval sheath
- Working channel allows the use of semirigid 5 Fr. operating instruments and bipolar electrodes
- Brilliant image quality thanks to HOPKINS® rod lens system



26120 BA **HOPKINS® Forward-Oblique Telescope 30°**, diameter 2.9 mm, length 30 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red

### With working channel

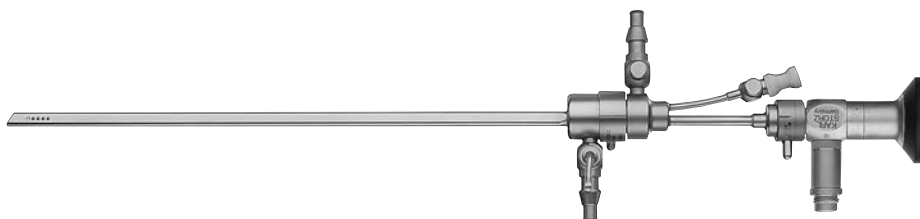

26153 BIK **BETTOCCHI® Inner Sheath**, size 4.3 mm, with working channel for semirigid 5 Fr. operating instruments, for use with Outer Sheath 26153 BOK including:  
**LUER-Lock Tube Connector**


26153 BOK **BETTOCCHI® Outer Sheath**, size 5 mm, for use with Inner Sheath 26153 BIK including:  
**LUER-Lock Tube Connector**

## Without working channel



26161 VBK **Inner Sheath**, diameter 3.8 mm, with 1 stopcock,  
for use with Outer Sheath 26161 VCK  
including:  
**LUER-Lock Tube Connector**

26161 VCK **Outer Sheath**, diameter 4.5 mm, with 1 stopcock,  
for use with Inner Sheath 26161 VBK  
including:  
**LUER-Lock Tube Connector**

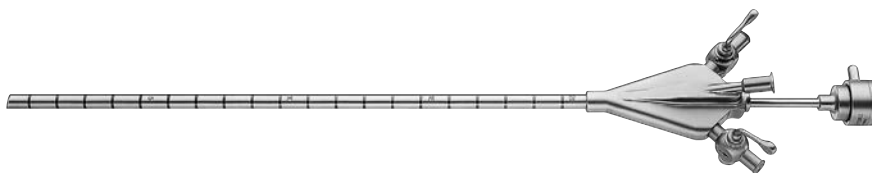

26153 EA **Hysteroscope Sheath**, size 5 mm, with channel for 5 Fr. operating  
instruments, no separate inner and outer sheaths

## Elongated BETTOCCHI® Hysteroscope

26120 BAL **HOPKINS® Forward-Oblique Telescope 30°**, diameter 2.9 mm,  
length 36 cm, **autoclavable**, fiber optic light transmission incorporated,  
color code: red

26153 BIL **BETTOCCHI® Inner Sheath**, size 4.3 mm, with channel  
for semirigid 5 Fr. operating instruments, with 1 stopcock,  
for use with Outer Sheath 26153 BOL

26153 BOL **BETTOCCHI® Outer Sheath**, size 5 mm, working length 28 cm,  
with 1 stopcock, for use with Inner Sheath 26153 BIL

The matching mechanical 5 Fr. instruments for the working channel bear the code number  
26160XX.

## BETTOCCHI® Hysteroscope (4 mm)

based on 2 mm rod lens telescope


### Special Features:

- Atraumatic insertion in the cervical canal due to oval sheath
- Very small outer diameter of only 4 mm
- Working channel allows the use of semirigid 5 Fr. operating instruments and bipolar electrodes
- Brilliant image quality thanks to HOPKINS® rod lens system



26008 BA **HOPKINS® Forward-Oblique Telescope 30°**, diameter 2 mm, length 26 cm, **autoclavable**, fiber optic light transmission incorporated, color code: red

### With working channel

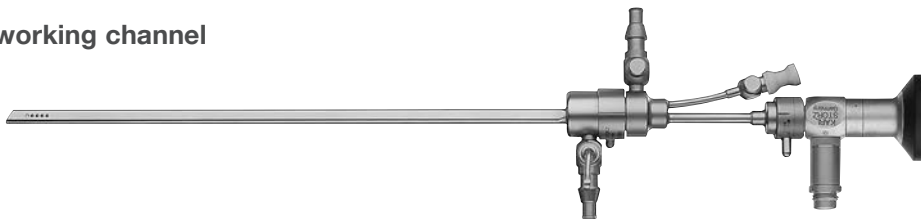

26152 BIK **BETTOCCHI® Inner Sheath**, size 3.6 mm, with working channel for semirigid 5 Fr. operating instruments, for use with Outer Sheath 26152 BOK including:

**LUER-Lock Tube Connector**

26152 BOK **BETTOCCHI® Outer Sheath**, size 4.2 mm, for use with Inner Sheath 26152 BIK including:

**LUER-Lock Tube Connector**

### Without working channel



26161 RNK **Inner Sheath**, diameter 2.8 mm, with 1 stopcock, for use with Outer Sheath 26161 RK including:


**LUER-Lock Tube Connector**

26161 RK **Continuous-Flow Outer Sheath**, diameter 3.6 mm, with 1 stopcock, for use with Inner Sheaths 26161 RNK and 26162 RNK including:

**LUER-Lock Tube Connector**

## Semirigid and Reusable 5 Fr. Operating Instruments

Length 34 cm

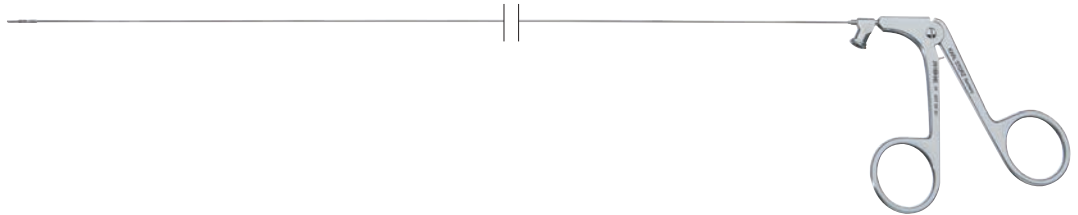

26159 EHW **Scissors**, semirigid, blunt, single action jaws, 5 Fr., length 34 cm



26159 SHW **Scissors**, semirigid, pointed, single action jaws, 5 Fr., length 34 cm



26159 UHW **Biopsy and Grasping Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm



26159 H HESSELING **Tenaculum Grasping Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm



26159 DHW **Punch**, semirigid, through-cutting, single action jaws, 5 Fr., length 34 cm



26159 BHW **Biopsy Spoon Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm

NEW



26159 DS DI SPIEZIO SARDO **Grasping Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm

NEW



26159 HS HESSELING and DI SPIEZIO SARDO **Tenaculum Grasping Forceps with Spike**, semirigid, double action jaws, 5 Fr., length 34 cm

## Reusable Bipolar 5 Fr. Electrodes

Length 42 cm



26159 BE **Bipolar Dissection Electrode**, semirigid,  
5 Fr., length 42 cm



26158 BE **Bipolar Vaporization Electrode**, semirigid, 5 Fr.,  
needle electrode angled 90°, length 42 cm



26159 GC GORDTS/CAMPO **Bipolar Ball Electrode**,  
semirigid, 5 Fr., length 42 cm



26176 LE **Bipolar High Frequency Cord**, length 300 cm



# Flexible Hysteroscope

## Special Features:

- Insertion in the cervical canal without dilation due to very small diameter of 3.5 mm
- Easy insertion in the cervical canal thanks to reinforced sheath
- Lockable distal deflection mechanism for better visualization of tubal ostia
- Working channel for use with flexible 3 Fr. operating instruments



11264 BBK1 **Hystero-Fiberscope**, with lockable deflection mechanism,

Deflection of distal tip:	110°/110°
Direction of view:	0°
Angle of view:	90°
Working channel diameter:	1.48 mm
Outer diameter:	3.5 mm/3.6 mm
Working length:	240 mm

**The following accessories are included in delivery:**

**Leakage Tester**  
**Cleaning Brush**  
**Sealing Cap**  
**LUER-Lock Sealing Cap**  
**Biopsy Forceps**  
**Grasping Forceps**  
**Sealing Cap**  
**Coagulation Electrode**  
**LUER-Lock Tube Connector**

## KARL STORZ TELE PACK X LED

The TELE PACK X LED system is an all-in-one unit that allows performance of high-quality outpatient hysteroscopies in minimum space with maximum comfort. This innovative device integrates a monitor, camera, documentation terminal and a powerful, yet quiet LED light source in one compact unit.

The TELE PACK X LED provides good visualization of hysteroscopic findings on the brilliant 15" flat screen monitor with LED backlight. Six USB ports and one SD card slot enable the storage of images and videos as well as direct print-outs in combination with compatible medical USB printers.

In combination with KARL STORZ hysteroscopes, this unit provides a high-quality, multifunctional and compact system for outpatient hysteroscopies.



- TP 100EN **TELE PACK X LED**, endoscopic video unit for use with all KARL STORZ TELECAM one-chip camera heads and video endoscopes, incl. LED light source similar to XENON technology, with integrated digital Image Processing Module, 15" LCD TFT monitor with LED backlight, USB/SD memory module, color systems PAL/NTSC, power supply 100-240 VAC, 50/60 Hz including:  
**USB Silicone Keyboard**, with touchpad, US character set  
**USB Flash Drive**, 32 GB  
**SD Card**, 32 GB  
**Mains Cord**, length 300 cm
- 20212030 **TELECAM One-Chip Camera Head**, color system PAL, soakable, gas-sterilizable, with integrated Parfocal Zoom Lens, f = 25-50 mm (2x), 2 freely programmable camera head buttons

## Recommended Set-ups for “Office Hysteroscopy”

Outsourcing hysteroscopic procedures makes it possible to free up OR capacity for major surgery. To accommodate the trend towards “office hysteroscopy”, we have combined the following compact set-up solutions for outpatient hysteroscopy for your convenience.

The TROLL-E mobile stand makes it possible to adjust the height of the TELE PACK X LED unit and the equipment rails as required. Equipped with the HOPKINS® rod lens system, the office hysteroscopes from KARL STORZ in conjunction with the latest suction and irrigation pumps provide optimal visualization with brilliant image quality and a minimally invasive approach.

### “TROPHY” Set-up

20 0200 81	<b>TROLL-E Mobile Stand</b>
TP 100 EN	<b>TELE PACK X LED</b>
20 2120 30	<b>TELECAM One-Chip Camera Head</b>
UP 210	<b>ENDOMAT® SELECT,</b> suction or irrigation pump
UP 602	<b>HYSTEROSCOPY Software</b> , license, for use with ENDOMAT® SELECT UP 210
26008 BAC	<b>CAMPO TROPHYSCOPE®</b> , HOPKINS® telescope 30°, size 2.9 mm, length 24 cm
26152 DA	<b>Continuous-Flow Examination Sheath</b> , size 3.7 mm, length 18 cm
26152 DB	<b>Continuous-Flow Operating Sheath</b> , size 4.4 mm, length 16 cm
26159 UHW	<b>Biopsy and Grasping Forceps</b> , semirigid, double action jaws, 5 Fr., length 34 cm
26159 SHW	<b>Scissors</b> , semirigid, pointed, single action jaws, 5 Fr., length 34 cm
<b>Accessories:</b>	
031523-10	<b>Tubing Set for Irrigation</b> , sterile, for single use, package of 10



Equipped with various software modules, ENDOMAT® SELECT is a roller pump that can be used for multiple surgical disciplines. In the operating room as well as the office setting or the clinical outpatient department, ENDOMAT® SELECT enables pressure-controlled dilation for both diagnostic and operative hysteroscopy.

## “BETTOCCHI®” Set-up

- 20 0200 81 **TROLL-E Mobile Stand**  
TP 100 DE **TELE PACK X LED**  
20 2120 30 **TELECAM One-Chip Camera Head**  
26 3400 01-1 UP 210 **ENDOMAT® SELECT**, suction or irrigation pump  
UP 602 **HYSTEROSCOPY Software**, license, for use with ENDOMAT® SELECT UP 210
- 26153 BIK **BETTOCCHI® Inner Sheath**, size 4.3 mm, with working channel for semirigid 5 Fr. operating instruments
- 26153 BOK **BETTOCCHI® Outer Sheath**, size 5 mm
- 26120 BA **HOPKINS® Forward-Oblique Telescope 30°**, diameter 2.9 mm, length 30 cm  
optional:
- 26159 UHW **Biopsy and Grasping Forceps**, semirigid, double action jaws, 5 Fr., length 34 cm
- 26159 SHW **Scissors**, pointed, single action jaws, semirigid, 5 Fr., length 34 cm
- Accessories:**
- 031717-10 **Tubing Set IRRIGATION**, with two puncture cannulas, sterile, for single use, package of 10
- 031217-10 **Tubing Set SUCTION**, sterile, for single use, package of 10  
optional:
- 031317-10 **Tubing Set**, with Monobloc connector and irrigation and suction tube



Equipped with various software modules, ENDOMAT® SELECT is a roller pump that can be used for multiple surgical disciplines. In the operating room as well as the office setting or the clinical outpatient department, ENDOMAT® SELECT enables pressure-controlled dilation for both diagnostic and operative hysteroscopy.

**It is recommended to check the suitability of the product for the intended procedure prior to use.**

**Reply**

**KARL STORZ SE & Co. KG  
Marketing Gynecology  
Dr.-Karl-Storz-Straße 34  
78532 Tuttlingen/Germany**

**or by fax to  
+49 7461 708-75585**

Yes, I am interested in **(Office) Hysteroscopy**

Please send me an **offer** regarding a:

- CAMPO TROPHYSCOPE®**  
(26008 BAC, 26152 DA/DB)
- **BETTOCCHI® Hysteroscope**
  - size 4 mm (26008 BA, 26152 BIK/26152 BOK)
  - size 5 mm (26120 BA, 26153 BIK/26153 BOK)
  - size 5 mm, elongated (26120 BAL, 26153 BIL/26153 BOL)
- Flexible Hysteroscope** (11264 BBK1)
- TELE PACK X LED** (TP 100EN and 20212030)
- “TROPHY” Set-up**
- “BETTOCCHI®” Set-up**
- I would like to request an appointment with a sales representative.

My address:

\_\_\_\_\_  
**Name, Title**

\_\_\_\_\_  
**Tel.**

\_\_\_\_\_  
**Clinic, Department**


\_\_\_\_\_  
**Fax**


\_\_\_\_\_  
**Street**

\_\_\_\_\_  
**E-mail**

\_\_\_\_\_  
**Postal Code, Town/City**

\_\_\_\_\_  
**Signature**

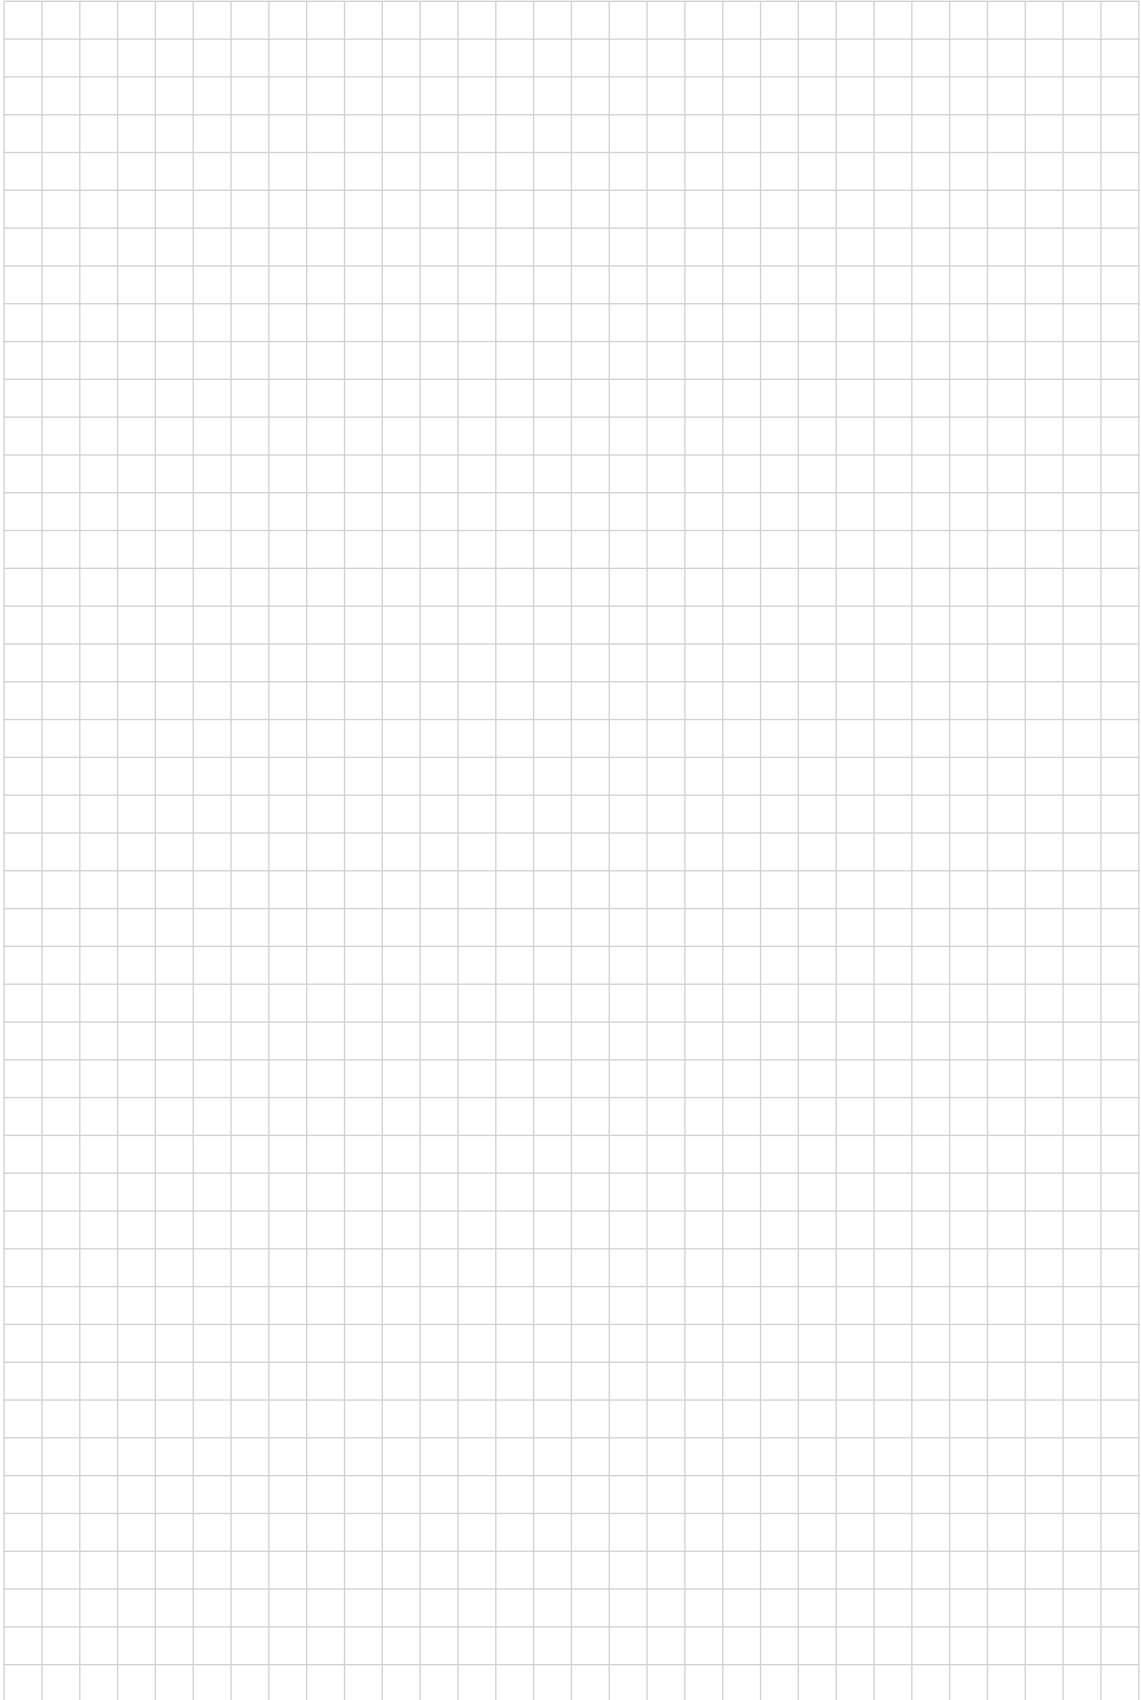

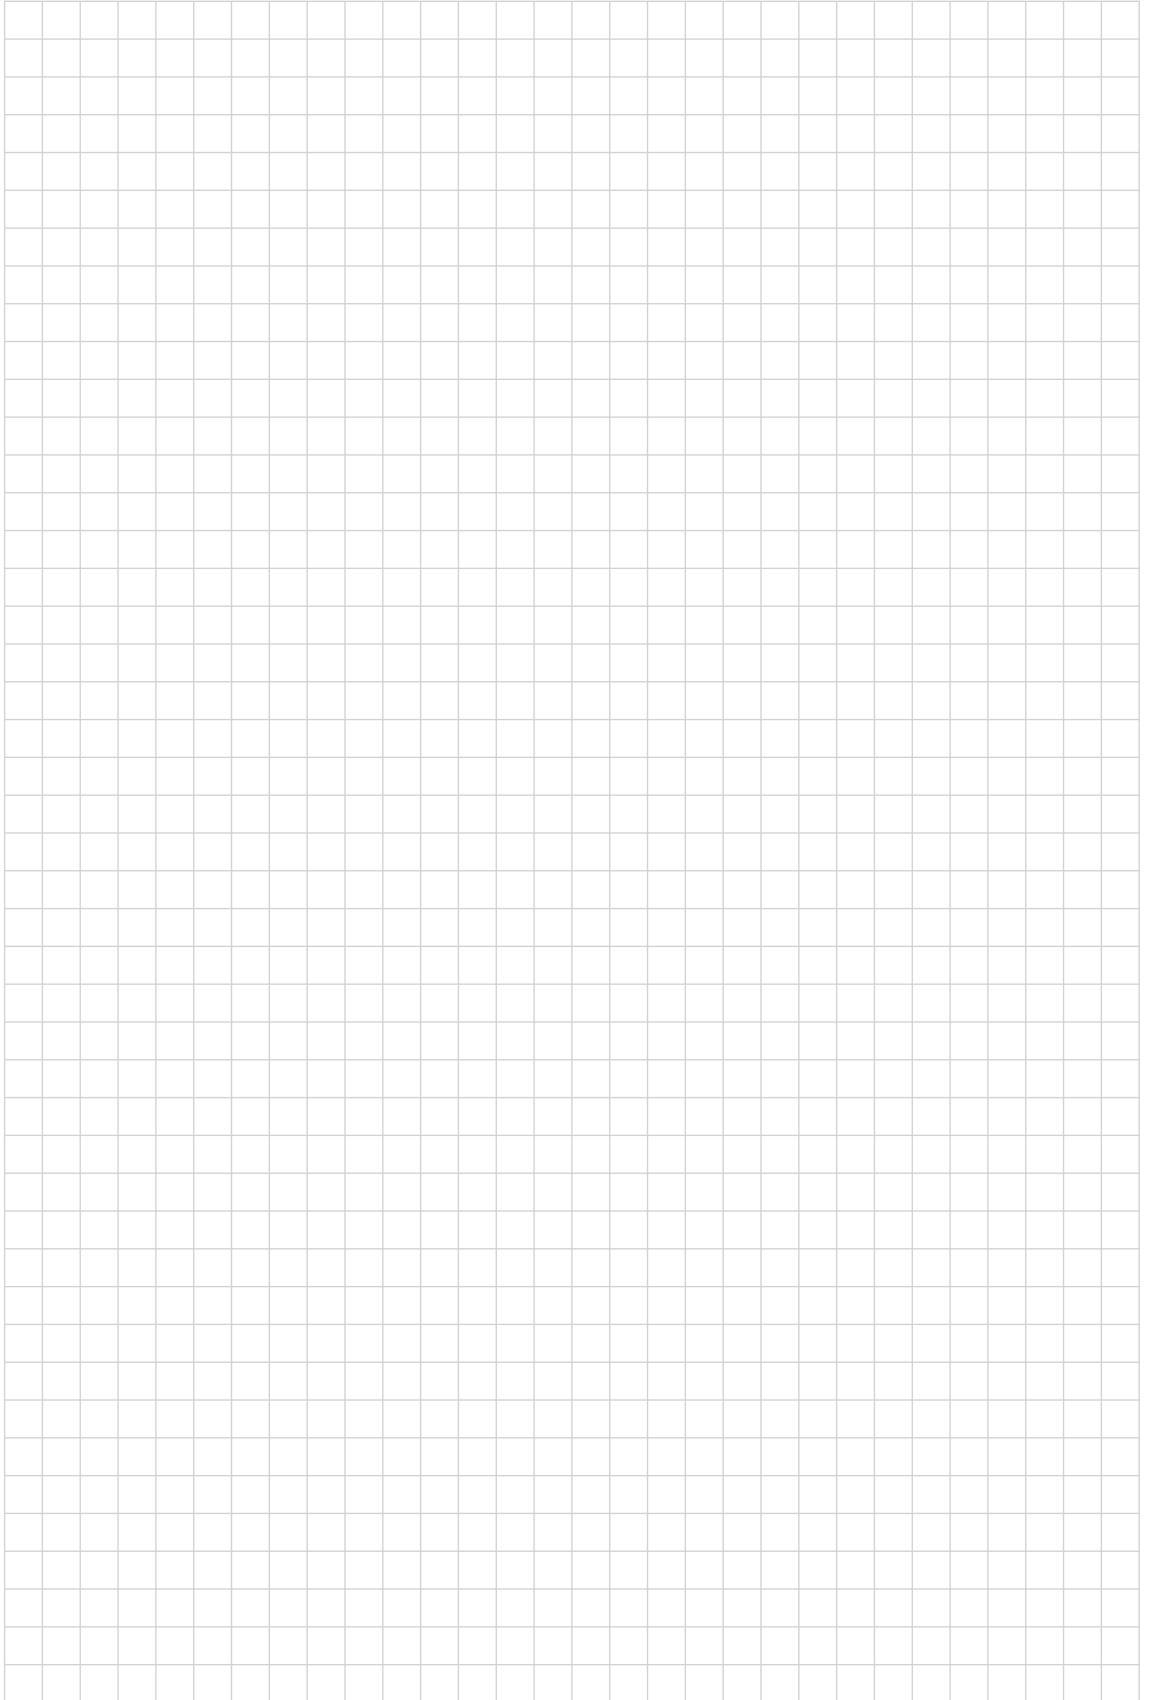



# 75 Years

*Shaping the Future  
of Endoscopy with you*

KARL STORZ Endoscopy-America, Inc.  
2151 East Grand Avenue  
El Segundo, CA 90245-5017, USA  
Phone: +1 424 218-8100  
Phone toll free: 800 421-0837 (US only)  
Fax: +1 424 218-8525  
Fax toll free: 800 321-1304 (US only)  
E-Mail: [communications@karlstorz.com](mailto:communications@karlstorz.com)

**STORZ**  
KARL STORZ—ENDOSKOPE

THE DIAMOND STANDARD

KARL STORZ SE & Co. KG  
Dr.-Karl-Storz-Straße 34, 78532 Tuttlingen/Germany  
Postbox 230, 78503 Tuttlingen/Germany  
Phone: +49 7461 708-0  
Fax: +49 7461 708-105  
E-Mail: [info@karlstorz.com](mailto:info@karlstorz.com)

[www.karlstorz.com](http://www.karlstorz.com)